


COM 440

ALUMINIUM BODY OUTDOOR COLUMN LOUDSPEAKERS

Loudspeakers with wide frequency response and high sensitivity are used for speech and background music reproduction in large areas. Typical applications include railway stations, subways, churches, factory buildings, warehouses, and outdoor parking areas. Primarily designed for outdoor use.

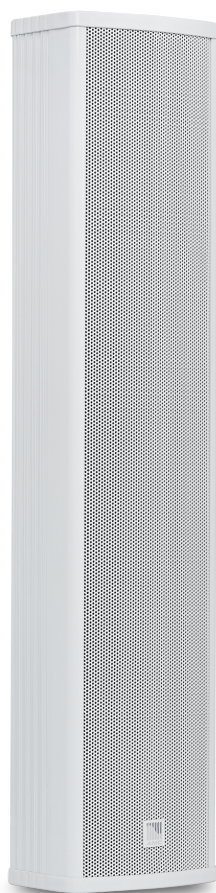


Technical Specifications	COM 440
Rated power	40 W
Transformer power taps	40 W - 20 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	110 dB (Pmax/1 m) at 8414 Hz
Frequency response	120 Hz - 20 kHz
Driver dimensions	4 x 4" (76.2 mm) woofer, 1.5" (38.1 mm) tweeter
Dispersion at 1000 Hz	180° (H), 140° (V)
Dimensions	655 mm x 150 mm x 125 mm
Protection	IP 66
Weight	5.9 kg
Material	Aluminum
Colour	White (RAL 9016)


COM 440

ALUMINIUM BODY OUTDOOR COLUMN LOUDSPEAKERS

Frequency response

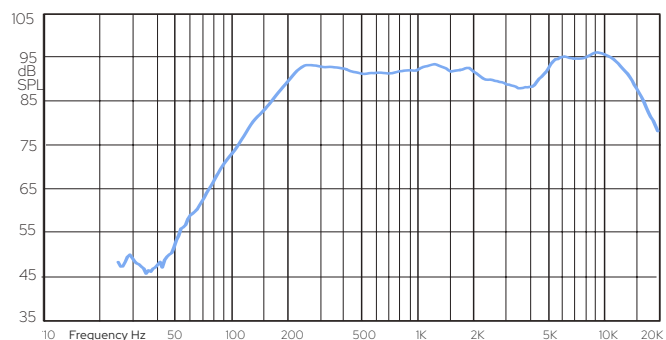

Impedance

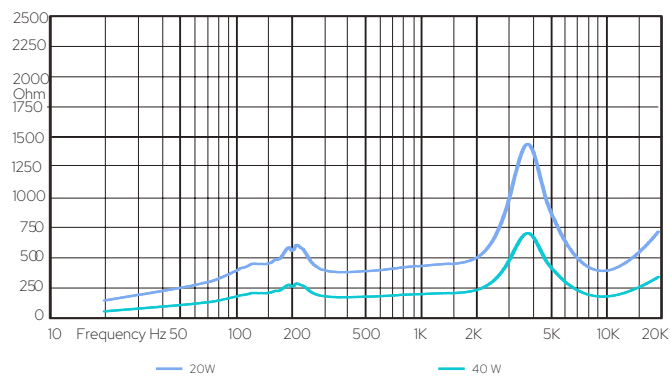

Horizontal/vertical polar diagrams

