

# EVAC 5

## METAL CEILING LOUDSPEAKERS WITH STEEL FIRE DOME

The EVAC5 is a voice evacuation speaker designed for installation in false ceilings or panels. It complies with the EN54-24 standard and is equipped with a ceramic terminal and a thermal fuse for enhanced safety. The speaker is primarily used in applications where clear and intelligible speech announcements are essential. It is also suitable for background music playback, making it a versatile solution for various public spaces.




Technical Specifications	EVAC 5
Rated power	6 W
Transformer power taps	6 W - 3 W - 1.5 W - 0.75 W - 0.25 W
Sensitivity	93 dB (1W/1m)
Maximum SPL	106 dB (Pmax/1 m) at 1584 Hz
Frequency response	240 Hz - 20 kHz
Dispersion at 1000 Hz	170° conical
Driver dimensions	5" (127mm)
Dimensions	Ø 185 mm x 118 mm
Weight	1.3 kg
Material	Steel
Colour	Speaker - white (RAL9016), fire dome - black (RAL9005)


# EVAC 5

## METAL CEILING LOUDSPEAKERS WITH STEEL FIRE DOME




Frequency response

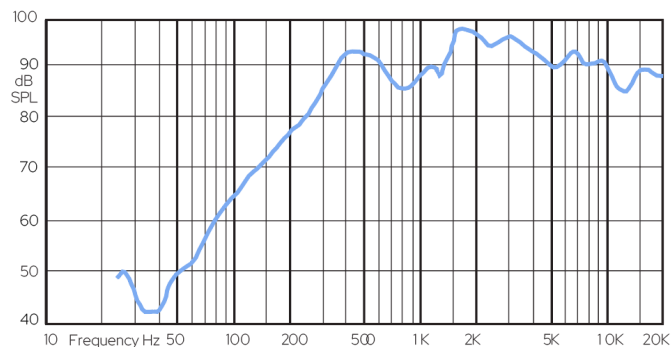

Impedance

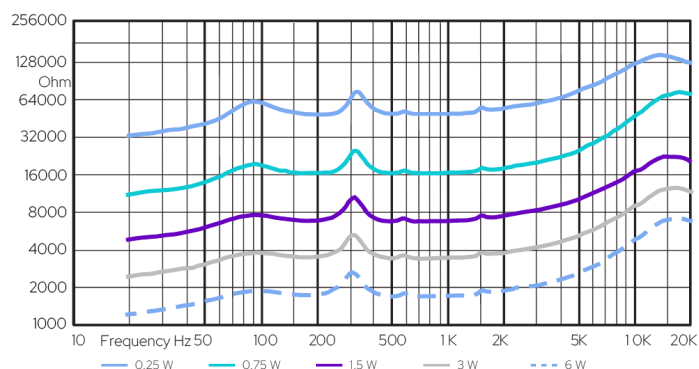

Horizontal/vertical polar diagrams

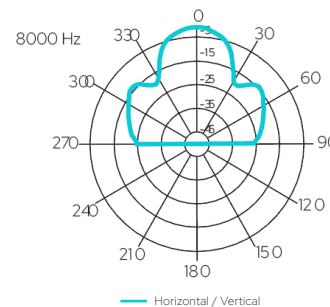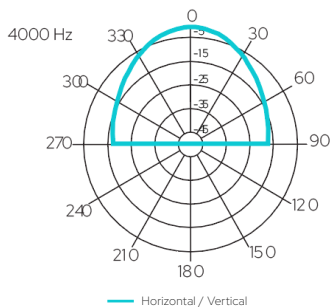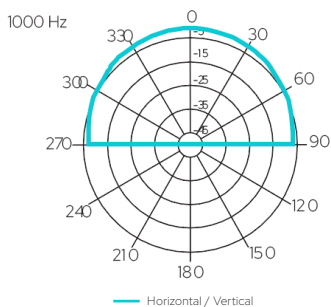

Dimensions

