

PC 6T

PLASTIC CEILING LOUDSPEAKER WITH 100 V TRANSFORMER

This cost-effective ceiling loudspeaker features a durable ABS plastic enclosure and is designed for quick installation into false ceilings. It offers full-range sound reproduction and serves as an ideal solution for large-scale public address systems where a high quantity of speakers is needed. Suitable for applications requiring a balance of background music and voice announcements.




Technical Specifications	PC 6T
Rated power	6 W
Transformer power taps	6 W - 3 W
Sensitivity	93 dB (1 W / 1 m)
Maximum SPL	100 dB (Pmax / 1 m)
Frequency response	100 Hz - 15 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	6" (152 mm)
Dimensions	Ø 188 mm x 76 mm
Weight	0.7 kg
Material	ABS plastic, steel grill
Colour	White (RAL9016)


PC 6T

PLASTIC CEILING LOUDSPEAKER WITH 100 V TRANSFORMER




Frequency response

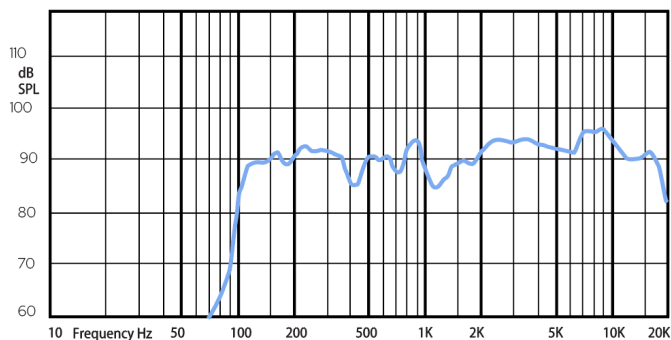

Impedance

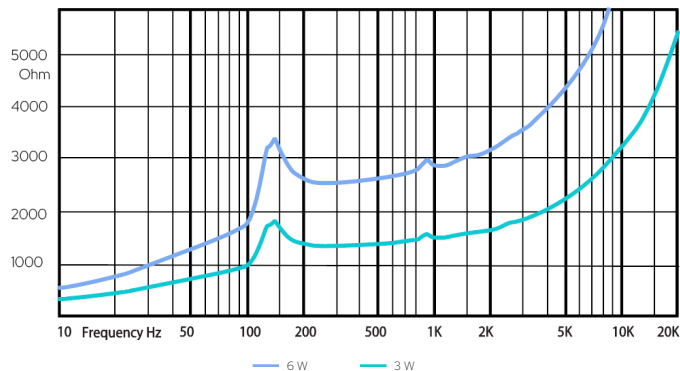

Horizontal/vertical polar diagrams

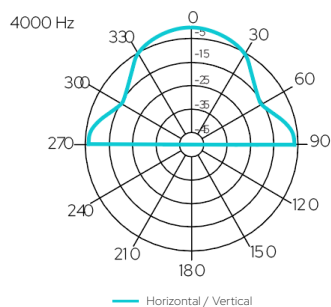

Dimensions

